

Dual-View X-ray Baggage Inspection System


AI TimeScan Dual View



AI-TimeScan-Dual View X-ray security inspection system is a new generation X-ray security inspection system that integrates multi-functions such as intelligent detection, baggage connection, High-Resolution display, etc. This model is applicable to be deployed in scenarios such as customs, Transportation terminals, office buildings, large events, courts, prisons, embassies, factories, schools, hospitals, public places, etc. The size of the tunnel is suitable for large suitcase, large parcels, extra-large backpacks, envelopes, handbags, etc.

- **Material Classification:** Advanced material discrimination technology to recognize different materials and assign different colors (3 or 6 colors).
- **Intelligent Recognition:** Integrated with the advanced detection algorithm, which could detect more than 35 major types of target objects and alarm on them automatically.
- **HD Image:** Integrated with the new generation of image processing system, which could provide with a clearer X-ray image with high resolution.
- **Variable Speed:** One-click to switch the conveyor speed to fit different application scenarios.
- **Remote Management:** Network integration supported real time status, X-ray images, videos, alarm information can be viewed remotely through Network, and report can be viewed and downloaded remotely for better management process.


Features



AI-Based



Baggage
Recording



Dual
View



High Resolution
Color Display



Sound &
Light Alarm



Multi
Energy



Baggage
Counter



Scan Palletized
Load

Technical Specification

Dimensions

Tunnel Dimensions	1000 mm (W) × 1000 mm (H)
System Dimensions	3576 mm (L) × 1536 mm (W) × 1828 mm (H)

General Specifications

Conveyor Height	300 mm
Conveyor Speed	0.2 m/s, 0.3 m/s, 0.4m/s adjustable
Max. Conveyor Capacity	200 kg

Performance

Wire Resolution	36/40 AWG
Penetration (Steel)	34/36 mm

X-ray Generator

Number of Generators	2
Anode Voltage / Current	160KV / 1.0mA(Adjustable)
Cooling / Working cycle	Oil-cooling / Continuous

Health and Safety

External dose rate	< 0.5 μ Sv/h (50mm Distance to the Housing)
Film Safe	Guaranteed up to ISO1600

Detection Algorithm


Prohibited Goods Detection	35 Major Types, over 64 categories
Others	Shield Alarms, etc.

Integrated Cameras

Cameras	5 camera, Resolution: 1920 x 1080
Sensor Type	1/2.8" Progressive Scan CMOS
Video Compression Standard	H.265 / H.264 / MJPEG

Installation Data	
Power Consumption	< 1.2 KVA
Power Supply	AC 220V (-15% to +10%) , 50Hz/60Hz (±3Hz)
Noise level	< 60 dB
Operating Temperature / Humidity	5 °C to 40 °C / 5 % to 95 % (non-condensing)
Storage Temperature / Humidity	-20 °C to 60 °C / 5 % to 95 % (non-condensing)
Weight	1170 Kg
Additional Features	
Image Processing	Color / Black & White(C/B&W), Organic Stripping (ORG-), Inorganic Stripping(INORG-), Negative, High / Low penetration (H/L), Absorptivity increase(ABS+), Absorptivity decrease(ABS-), Super Enhancement (SEN), Edge Enhancement(Edge), 64x seamless zoom in and out, etc.
Software Functions	Professional TIP system, Operation Intro, Photo and X-ray image connection, etc
Operation Display	21.5 inch Screen x 2
Storage	100,000 +

Dimension Drawing

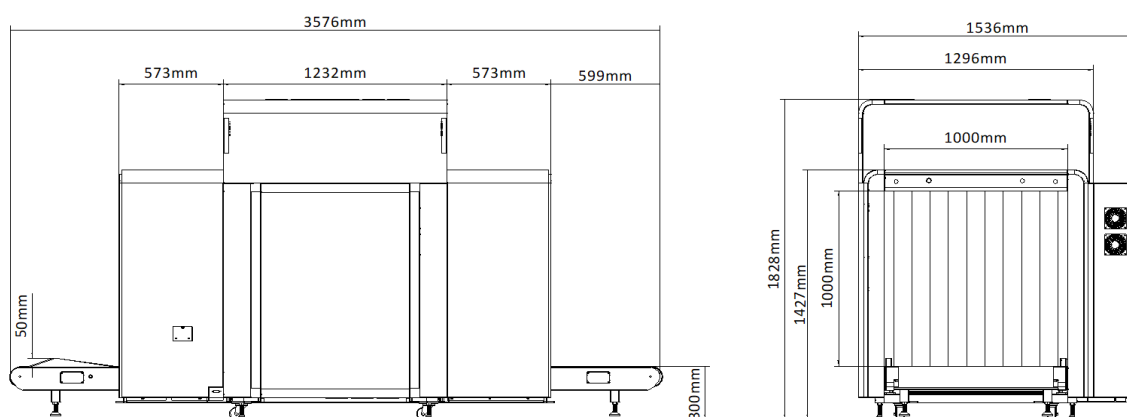

Application



Airport



Railways



Defense



Education



Hospital



Government



Office



Bank



Retail

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.