


Time Attendance & Access Control Terminal TrueFace6000FP

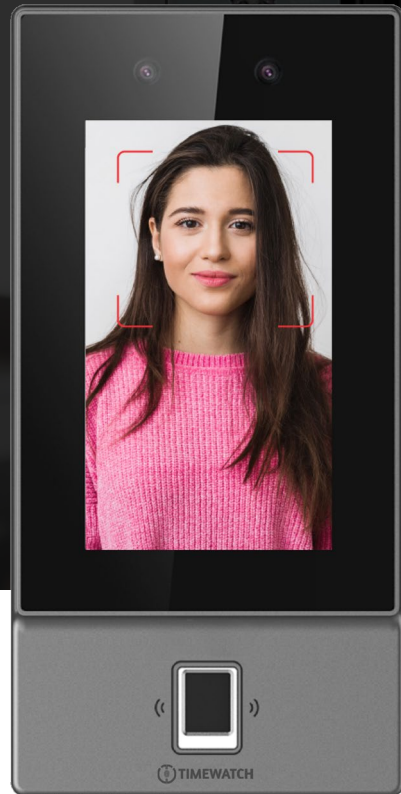

TrueFace6000FP is a face recognition time attendance and access control terminal designed for high-security environments. Equipped with a 4.3-inch glass touch screen and a 2-MP wide angle dual-lens camera with IR illumination and DWDR, it delivers fast and accurate authentication with 99.9% face recognition accuracy in just 0.2 seconds.

Supporting multiple verification methods including Face, Fingerprint, MIFARE Card, Password, and QR Code, it provides flexible and secure access control. With a capacity of up to 10,000 users, integrated attendance management, visitor QR support, face mask and safety helmet detection, TCP/IP, Wi-Fi, PoE, and an IP65-rated weatherproof design, the TrueFace6000FP is an ideal solution for offices, factories, commercial buildings, industrial facilities, and other demanding applications.

Verification & Features




Technical Specification

Capacity	
User Capacity	10,000
Face Capacity	10,000
Fingerprint Capacity	10,000
Card Capacity	10,000
Password Capacity	10,000
QR Capacity	10,000
Log Capacity	3,00,000
System	
Main Processor	Embedded Processor
Operating System	Linux
Button Type	Touch button
Network Protocol	UDP; TCP; IPv4; RTSP; SIP; P2P; RTP
OSDP Protocol	Yes
Interoperability	ONVIF; CGI
SDK and API	Yes
Basic	
Product Type	Standalone
Display Screen	4.3" LCD
Screen Type	Capacitive Touchscreen
Screen Resolution	272 (H) × 480 (V)
Camera	2-MP CMOS HD dual-lens camera
WDR	DWDR
Light Compensation	Auto IR
Voice Prompt	Yes
Buzzer	Yes
Casing	PC + ABS
Function	
Unlock Mode	Face, Fingerprint, Card, Password and QR
Card Type	MIFARE Card

Period List	128 periods
Holiday Period	128 periods
Network Update	Yes
First User Unlock	Yes
Remote Verification	Yes
Restricted List/Trusted List	Yes
Peripheral Card Reader	1 × RS-485 card reader; 1 × Wiegand card reader
Multi-user Authentication	Yes
Real-time Monitoring	Yes
Capture Function	Yes
Web Configuration	Yes
Auto Registration	Yes
Performance	
Card Reading Distance	0 cm–3 cm (0"–1.18")
Face Recognition Height Range	1.1 m– 2.0 m (3.61 ft–6.56 ft)
Face Recognition Distance	0.3 m–1.5 m (0.98 ft–4.92 ft)
Face Recognition Accuracy	99.9%
Face Recognition Time	0.2 s
Fingerprint Recognition Time	0.2 s
Read Speed (QR Code)	500 ms
Port	
RS-485	1
Wiegand	1
USB	1 × USB 2.0
Network Port	1 × RJ-45 10/100 Mbps self-adaptive Ethernet port
Exit Button	1
Alarm Input	1
Alarm Output	1
Alarm Linkage	Yes
Lock Control	1
Door Status Detection	1

Alarm	
Anti-pass Back	Yes
Tamper Alarm	Yes
Duress Alarm	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes
General	
Power Adapter	Standard
Power Supply	Standard PoE, 12 VDC, 1.5 A
Power Consumption	≤12 W
Protection	IP65
Product Dimensions	180.1mm*90.1mm*27.0mm (7.09"*3.55"*1.06") (L*W*H)
Operating Temperature/Humidity	-30°C to +60°C / 0%–90% (RH), non-condensing
Operating Environment	Outdoor, Indoor
Gross Weight	0.70 kg (1.54 lb)
Accessory	Wall mount bracket (included)

Dimension Drawing

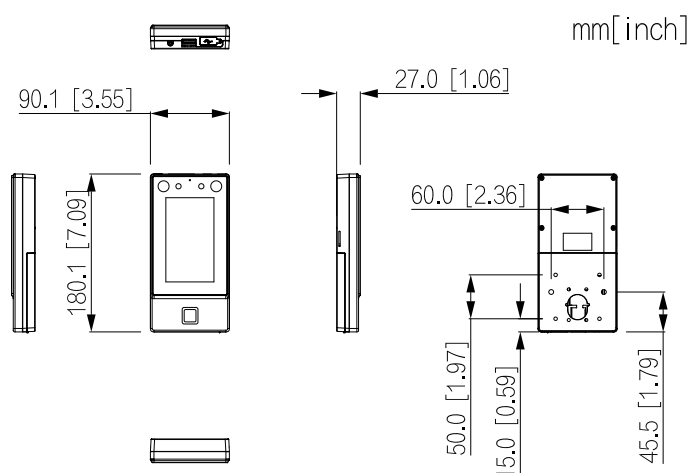

Application



Education



Office



Government



Health



Bank



Logistics



Factory



Retail

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.