



Verification



Face



Fingerprint



Password



Card




QR

Features



PoE Support



AI Based



Mask Detection



Live Detection



Cloud



Touch Screen




WDR



IP65 Rating



MultiFace

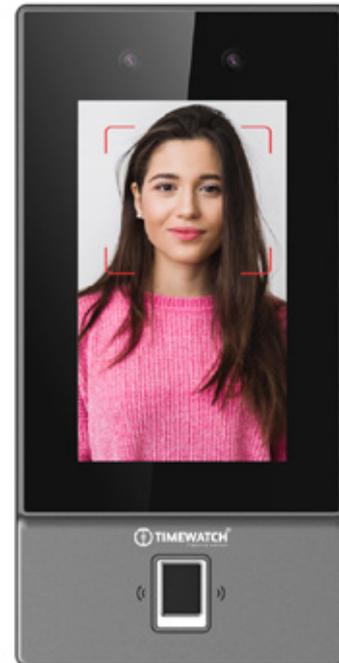

TrueFace Recognition Device

TrueFace6000FP-PW

- 4.3 inch glass touch screen with a resolution of 272 x 480.
- 2-MP wide-angle dual-lens camera with IR illumination and DWDR.
- Multiple unlock methods including Face, Fingerprint, Card and Password.
- Supports 10,000 Users, 10,000 Faces, 10,000 Fingerprint, 10,000 Passwords, 10,000 Cards, 10,000 QR's, 50 Administrators, and 3,00,000 Records.
- Recognizes faces 0.3 m to 1.5 m away (0.98 ft-4.92 ft); face recognition accuracy rate of 99.9% and the 1:N comparison time is 0.2 s per person.
- Supports improved security and to protect against the device being forcefully opened, security module expansion is supported.
- Features face mask detection and safety helmet detection.
- Manages attendance and exports attendance records.
- Supports visitor QR code.
- TCP/IP and Wi-Fi connection.
- PoE Power Supply
- IP65 rated.



Specification

| Capacity | |
|------------------------------|--|
| User Capacity | 10,000 |
| Face Capacity | 10,000 |
| Fingerprint Capacity | 10,000 |
| Card Capacity | 10,000 |
| Password Capacity | 10,000 |
| QR Capacity | 10,000 |
| Log Capacity | 3,00,000 |
| System | |
| Main Processor | Embedded Processor |
| Operating System | Linux |
| Button Type | Touch button |
| Network Protocol | UDP; TCP; IPv4; RTSP; SIP; P2P; RTP |
| OSDP Protocol | Yes |
| Interoperability | ONVIF; CGI |
| SDK and API | Yes |
| Basic | |
| Product Type | Standalone |
| Display Screen | 4.3" LCD |
| Screen Type | Capacitive Touchscreen |
| Screen Resolution | 272 (H) × 480 (V) |
| Camera | 2-MP CMOS HD dual-lens camera |
| WDR | DWDR |
| Light Compensation | Auto IR |
| Voice Prompt | Yes |
| Buzzer | Yes |
| Casing | PC + ABS |
| Function | |
| Unlock Mode | Face, Fingerprint, Card, Password and QR |
| Card Type | MIFARE Card / Proximity Card |
| Period List | 128 periods |
| Holiday Period | 128 periods |
| Network Update | Yes |
| First User Unlock | Yes |
| Remote Verification | Yes |
| Restricted List/Trusted List | Yes |



| | |
|---------------------------|---|
| Peripheral Card Reader | 1 × RS-485 card reader; 1 × Wiegand card reader |
| Multi-user Authentication | Yes |
| Real-time Monitoring | Yes |
| Capture Function | Yes |
| Web Configuration | Yes |
| Auto Registration | Yes |

Performance

| | |
|-------------------------------|--------------------------------|
| Card Reading Distance | 0 cm–3 cm (0"–1.18") |
| Face Recognition Height Range | 1.1 m– 2.0 m (3.61 ft–6.56 ft) |
| Face Recognition Distance | 0.3 m–1.5 m (0.98 ft–4.92 ft) |
| Face Recognition Accuracy | 99.9% |
| Face Recognition Time | 0.2 s |
| Fingerprint Recognition Time | 0.2 s |
| Read Speed (QR Code) | 500 ms |

Port

| | |
|-----------------------|---|
| RS-485 | 1 |
| Wiegand | 1 |
| USB | 1 × USB 2.0 |
| Network Port | 1 × RJ-45 10/100 Mbps self-adaptive Ethernet port |
| Exit Button | 1 |
| Alarm Input | 1 |
| Alarm Output | 1 |
| Alarm Linkage | Yes |
| Lock Control | 1 |
| Door Status Detection | 1 |

Alarm


| | |
|----------------------------------|-----|
| Anti-pass Back | Yes |
| Tamper Alarm | Yes |
| Duress Alarm | Yes |
| Door Sensor Timeout | Yes |
| Intrusion | Yes |
| Illegal Card Exceeding Threshold | Yes |

General

| | |
|-------------------|-----------------------------|
| Power Adapter | Standard |
| Power Supply | Standard PoE, 12 VDC, 1.5 A |
| Power Consumption | ≤12 W |

| | |
|-----------------------|--|
| Protection | IP65 |
| Product Dimensions | 180.1mm*90.1mm*27.0mm (7.09"*3.55"*1.06") (L*W*H) |
| Packaging Dimensions | 590mm*432mm*302mm (23.23"*17.01"*11.89") (L*W*H) Protection Box |
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) |
| Operating Humidity | 0%–90% (RH), non-condensing |
| Operating Altitude | 0 m–1,300 m (0 ft–4265.09 ft) |
| Operating Environment | Outdoor, Indoor |
| Gross Weight | 0.70 kg (1.54 lb) |
| Accessory | Wall mount bracket (included) |

Dimensional Drawing

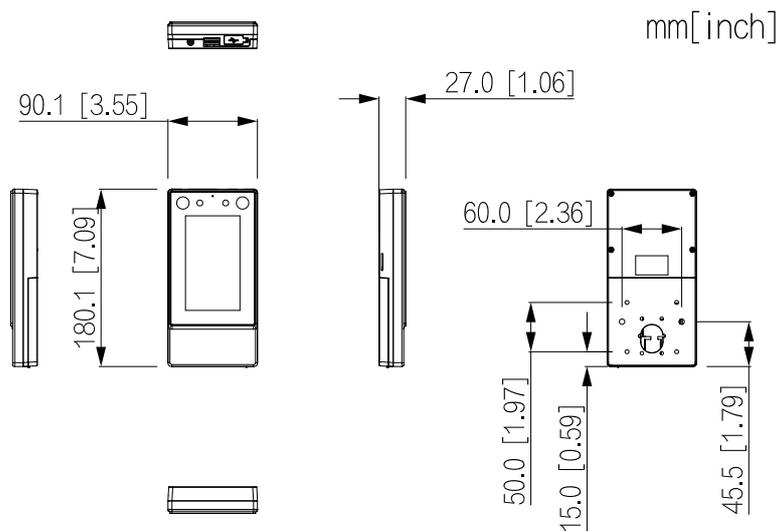

Applications



Education



Retail



Government



Health



Bank



Logistics



Office



Factory



Head Office : D-162, Okhla Industrial Area Phase I,
New Delhi, 110020.



Regional Office : Mumbai, Bengaluru, Ahmedabad,
Chennai, Kolkata.

International Office : Dubai

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.



Phone : +91-95999-53923



Sales : sales@timewatchindia.com



Support : helpdesk@timewatchindia.com