TIMEWATCH®
Presence perfect

Tripod Turnstile Gate

TWLD-TS2704



TWLD-TS2704 Semi-Automatic Tripod Turnstile operates smoothly, allowing effortless passage with minimal resistance.

It features multiple working modes, including bi-directional and single-directional operation, all of which can be easily configured using buttons on the main control board. In the event of a power outage, the arms automatically drop to allow free passage, and the system halts operation if obstacles are detected for enhanced safety. Additionally, it supports integration with facial recognition biometrics and other touchless technologies for a seamless, no-contact experience.


Features

- Life Time No Maintenance
- SS304
- Failure proof Electromagnetic Solenoid valves
- ≥5 million times
- No attrition & High Temperature Resistant
- Low Noise & High Intelligence

Technical Specification

Type	Bridge Type
Integration	Face, Finger, Card, PIN & QR
Housing Material	SS304, Acrylic
Passage Width	510 mm
Dimension	1200(L) × 240(W) × 1000(H) mm
Traffic Direction	Bi-Directional
Flow Rate	25–30 People/min (Normally Open Mode) 15–20 People/min (Normally Closed Mode)
Opening Signal	Dry Contact Signal
Lifetime	≥ 5 Million Cycles
Power Consumption	30–60 W
Operating Temperature	-20˚C to +70˚C

Dimension Drawing

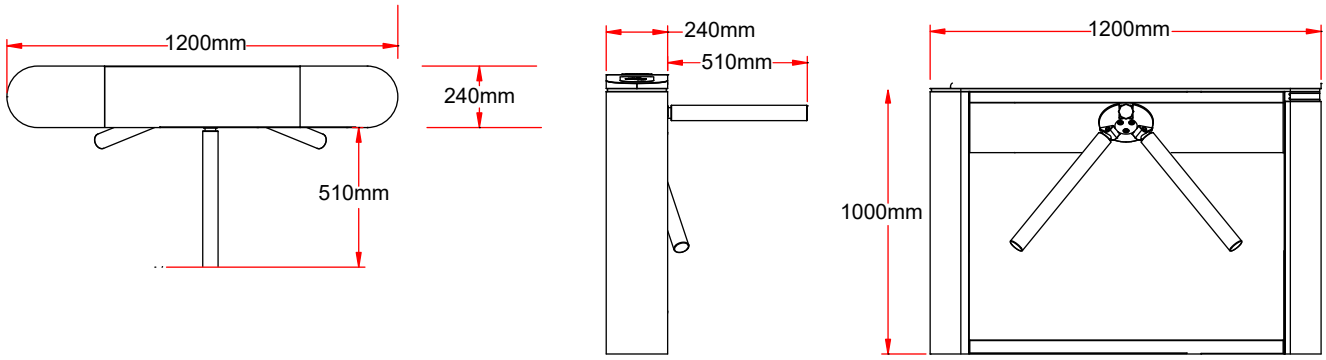

Application

Airport | Railways | Defense | Education | Hospital | Government | Office | Bank | Retail

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.