

Verification



Face




Card



Password

Features



AI Based



Mask Detection



Multi Face



Live Detection



Cloud




Wi-Fi



Touch Screen



IP65

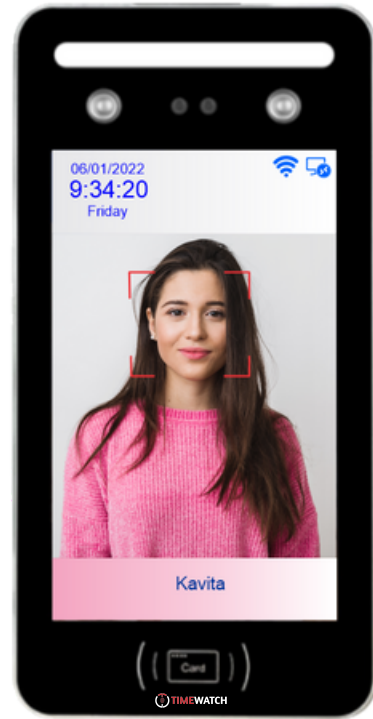

Face Recognition Device

ULtraFace-T6

ULtraFace-T6 series face recognition terminal is an AI-based next-generation device specially built for large enterprises and has 50,000 faces, 50,000 cards, and 50,000 password capacity. The device has advanced features like face mask detection, speed face recognition, and an excellent user interface for smooth operations.

The device comes with a 8-inch HD touch screen and adopts a deep learning algorithm, which helps to recognize the face faster with higher accuracy. ULtraFace-T6 is equipped with a dual camera with features like low light face recognition, anti-spoofing, anti-counterfeiting, and WDR(Wide Dynamic Range), i.e., supports accurate face recognition under Strong light, dark light, and backlight.



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020



sales@timewatchindia.com
www.timewatchindia.com

Technical Specification

Verification & Capacity	
Identification	Face, Card & Password
Face Capacity	50,000
Card Capacity	50,000
Password Capacity	50,000
Log Capacity	5,00,000
Image Log	650 per day
System	
Operating System	Linux
Main Processor	Embedded Processor, 1.2 GHz
Internet Protocol	DHCP; TCP; IPv4; RTSP; SSL; P2P; RTP
SDK and API	Yes
Basic	
Display	8 inch
Screen Type	HD capacitive touch screen
Resolution	800x1280
Camera	2-MP with IR sensor
WDR	DWDR
Light Compensation	Auto IR
Voice Prompt	Yes
Function	
Unlock Mode	Face, Card & Password
Connectivity	TCP/IP, Wi-Fi, USB, RS-485, 4G GPRS
Period List	128
Holiday Period	128
First-Card Unlock	Yes
Anti Spoofing	Yes
Anti Counterfeiting	Yes
Low Light Verification	X2
Ambient light adaptation range	0-50000Lux



Multi-user Authentication	Yes
Real-time Monitoring	Yes
Multi-factor Authentication	Yes
Multi-user Authentication	Yes
Capture Function	Yes
Auto Registration	Yes

Performance

Card Reading Distance	0 cm-3 cm
Face Recognition Height Range	0.9 m-2.4 m
Face Recognition Distance	0.5 m-1.5 m
Face Recognition Accuracy	99.9%
Face Recognition Time	0.2 s
Terminal Authentication mode	Yes
Face Verification Mode	1:1, 1:N

Ports

RS-485	1
RS-232	1
Wiegand	1 input/output
USB	1 USB2.0 port
Network Port	1 × RJ-45 10/100/1000 Mbps Ethernet port
Alarm Linkage	Yes
Exit Button	1
Door Status Detection	1
Lock Control	1


Alarm

Tamper Alarm	Yes
Duress	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes




General	
Power Supply	Provided
Power Supply Mode	DC 12V, 2amp
Power Consumption	≤24 W
Working Temperature	-15°C to +55°C
Working Humidity	0%RH–90%RH (non-condensing)
Battery backup	2 hour
IP Rating	IP65
Metal Enclosure	Yes
Sound Indicator	Buzzer, Voice
Installation Method	Turnstile mount, Pole mount, Wall mount & Handheld
Certificate	CE, FCC, RoHS & BIS

 **Head Office :** D-162, Okhla Industrial Area Phase I, New Delhi, 110020.

 **Regional Office :** Mumbai, Bengaluru, Ahmedabad, Chennai, Kolkata.

International Office : Dubai

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.

 **Phone :** +91-95999-53923

 **Sales :** sales@timewatchindia.com

 **Support :** helpdesk@timewatchindia.com